

**Air Handling Systems Newsletter**  
www.airhand.com

**INDUSTRIAL STRENGTH  
Ductwork Direct**  
March 2017

### Products in Action

Customer for over twenty-two years, this growing cabinet shop in Yuma, Arizona needed a Multi-Tap Manifold for their new edge bander.



Connecticut based leader in progressive stamping and precision metal components, our customer had a need to improve dust collection on this sanding line.



Close up of new dust collection hooding.

### Upcoming Events

**Fine Woodworking Live 2017  
APRIL 21-23**

**Southbridge, Mass.** Curt Corum, Sales Manager, will be presenting:



**Setting up shop dust collection**  
Saturday, April 22, 10:30-12 and again at 3:30-5 pm

**AWFS, Las Vegas  
JULY 19-22**

Find IT  
See IT  
Experience IT




2017 AWFS Fair CWWK (College of Woodworking Knowledge) educational seminar program has been set! Jamison Scott, Air Handling Systems will be co-presenting, moderating and presenting:

"Dust Collection for Secondary Wood Operations"  
Date: Wednesday, 7/19/17  
Time: 11:30 a.m. - 1:00 p.m.

"Legislation Affecting the Woodworking Industry"  
Date: Wednesday, 7/19/17  
Time: 3:30 p.m. - 5:00 p.m.

"Dust Collection for Small Shops"  
Date: Thursday, 7/20/17  
Time: 9:30 a.m. - 11:00 a.m.

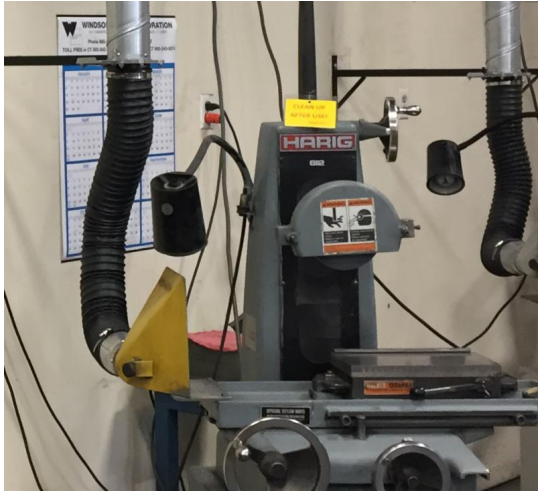

## Highly Abrasion Resistant U30-AS Antistatic Hose



U30-AS antistatic, polyurethane, medium-heavy highly abrasion resistant, microbe resistant and flame retardant flexible hose ideal for a variety of applications.

Industries/applications include combustible dust, woodworking, abrasive powder, bulk material, offset printing, UV dryer, IR dryer, textile, clean room ventilation. Flame-retardant according to DIN 4102-B1. Permanently antistatic wall: electrical and surface resistance <math>< 10^9 \Omega</math>

Construction: 30-MIL approx. permanently antistatic ester-polyurethane with a spring steel wire helix firmly embedded in wall. Color: Transparent. Standard Length: 25 ft. or 12.5 ft. for \$10 cut charge. Temp. Range: -40F to 195F (255F intermittent)

Standard 25 feet length. \$10 cutting charge for 12.5 feet length.

[Click here for more information](#)

## Light Weight U20-AS Antistatic Flexible Hose



U20-AS antistatic, light weight, highly flexible, compressible (3:1), abrasion resistant, microbe resistant and flame retardant flexible hose. Lighter weight, lighter duty version of the U30-AS. Flame-retardant according to DIN 4102-B1. Permanently antistatic wall: electrical and surface resistance <math>< 10^9 \Omega</math>

Construction: 20-MIL (.020) approx. permanently antistatic ester-polyurethane with a spring steel wire helix firmly embedded in wall. Color: Clear. Standard Length: 25 ft. or 12.5 ft. for \$10 cut charge. Temp. Range: -40F to 195F (255F intermittent).

Standard 25 feet length. \$10 cutting charge for 12.5 feet length.

[Click here for more information](#)

## Air Handling Catalog

2017 Air Handling Systems catalog is now available. To request your free copy please call 800-367-3828 or email [sales@airhand.com](mailto:sales@airhand.com).



### Like/View/Follow us



Air Handling Systems, 5 Lunar Dr, Woodbridge, CT 06525

[SafeUnsubscribe™ {recipient's email}](#)

[Forward email](#) | [Update Profile](#) | [About our service provider](#)

Sent by [jscott@airhand.com](mailto:jscott@airhand.com) in collaboration with



Try it free today